



SEIKOH GIKEN



SFP-550E3 EZ-Maintenance & High Duty Cycle Multi-Timer Polishing Machine


■ Features / Benefits

Speed Control


- Variable revolution speed (70rpm to 200rpm)

Touch Panel

- Multi timer is featured on the Touch Panel (4 timers)
- Programmable polishing process (8 steps each x 12 processes)

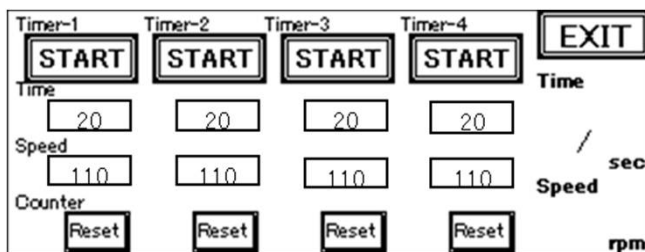

Touch panel view for Multi timer polishing mode

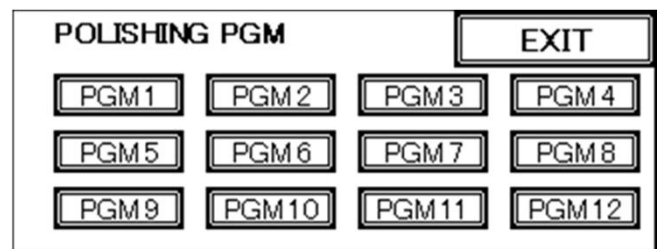

Touch panel view for Program polishing mode

EZ-Maintenance & High Duty Cycle

- Factory applied special treatment turntable and support ring to extend parts service life.
- Innovative pressurizing unit re-design allows easier spring and knock pin adjustment and replacement
 - *Improve mechanical durability and achieved reduction of maintenance cost in 1/10 compared to SFP-550E*

Multi Fiber (MT) Polishing

- By adding Center Pressure Module, the machine can be converted to advanced multi fiber polisher.

SFP-550E3

Data Sheet

Available Plates & Accessories

Description:	Platinum Holder Part #
FC/PC I.P.C. Polishing Plate	PH55-FP-20
FC/APC I.P.C. Polishing Plate	PH55-FP8*-18-I or 32N
SC/PC I.P.C. Polishing Plate	PH55-CP-20 or 32N
SC/APC I.P.C. Polishing Plate	PH55-CP8*-18-I or 32N
ST/PC I.P.C. Polishing Plate	PH55-SP-20 or 28N
LC/PC I.P.C. Polishing Plate	PH55-PL-24, 40N or 48N
LC/APC I.P.C. Polishing Plate	PH55-PL8A-20, 40N or 48N
MU/PC I.P.C. Polishing Plate	PH55-PM-24, 40N
MU/APC I.P.C. Polishing Plate	PH55-PM8A-20
2.5mm ferrule Polishing Plate	PH55-FF-20, 40N
1.25mm ferrule Polishing Plate	PH55-FLM-16, 24, or 40N

*Must specify step or conical ferrule for FC & SC Angled
*Tolerance of APC holder key error is +/-1.0 degree.


Description:	MT Holder Part #
MT/PC Polishing Plate	PH55-MT-24S <i>New</i>
MT/PC Polishing Plate	PH55-MT-12S <i>New</i>
MT/APC Polishing Plate	PH55-MT8A-24S <i>New</i>
Center Pressure Module	PH55-MT-PRM <i>New</i>

Please contact for connector types not listed.
Custom made holders are available upon request

Description:	Film Part #
30um Silicon Carbide	GA5D
9um Diamond	DR5D-9U
3um Diamond	DH5D-3U
1um Diamond	DJ5D-1U
Silica	XF5D

Description: _____
Rubber & Glass Pads Available for various Hardness & Thickness (*ask for details*):
60, 65, 70, 75, 80, 85 & 90 durometer
4.8, 4.9, 5.0, & 5.05 mm thickness All for 5" diameter

New MT 24-axis Holder



Specifications


Applicable Conn.:	FC,SC,ST, LC, MU, D4, E2000(Zr. Type), MT, MT-RJ 8 deg. or 0 deg.
Polishing Time:	2.0 min for D2.5 PC and 3.7 min for D2.5mm APC
Weight:	18.5Kg
Dimensions:	260W x 320D x 290H(mm)
Power:	100-120VAC, 50/60Hz or 220-240VAC 50/60Hz
Motor Speed:	70 to 200rpm revolution, 0.7 to 2.0 rpm rotation (auto)
Film size:	5"
Polishing Method:	Rotation & Revolution (<i>Patent # 4979334</i>)
Timer:	Multi (4 timers) by Touch panel

Standard Package

Description	Part #	Qty
Main Unit	SFP-550E3	1
Coil Spring	RP55C-14	4
2A Fuse	FP-F2A	1
Hexagon Wrench L	RP55C-71	1
Hexagon Wrench S	RP55C-72	1
M5-45 Bolt	RP55C-73	1
Power Cable	FP-AC***	1
Cable Hanger	FP-CHL	1
Operating Manual	FP-IM55E3	1
Process Manual	FP-PM55E3	1
Maintenance Man.	FP-MM55E3	1

Standard I.P.C. Holders

Available for FC,SC,ST,MU,& LC
Up to 24 connectors polishing at once



Independent
Pressure Control

Mega-axis I.P.C. Holders

Available for FC,SC,ST,MU,& LC
Up to 48 connectors polishing at once

WORLDWIDE SALES NETWORK:

North America

SEIKOH GIKEN USA, Inc.
Atlanta, Georgia
Tel: +1-770-279-6602
Fax: +1-770-279-8839
sales@sg-usa.com

Europe

SEIKOH GIKEN Europe GmbH
Frankfurt, Germany
Tel: +49-6102-297-701
Fax: +49-6102-297-750
info@sg-euro.de

Asia

SEIKOH GIKEN Co.,Ltd.
Matsudo, Japan
Tel: +81-47-388-3111
Fax: +81-47-388-2009
sales.div@seikoh-giken.co.jp

Seikoh Giken reserves the right to improve, enhance and modify features and specifications of Seikoh Giken products without prior notifications