



OVA-100

Optical Variable Attenuator



Product Overview

The Optical Variable Attenuator, OVA-100, enables precise optical power control featuring high accuracy and superior repeatability. It can be used as a benchtop or rackmount instrument.

The OVA-100 is ideal for lab and production applications including power level adjustments in automated test systems, Bit Error Rate Testing (BERT) of transceivers, and channel equalization in WDM systems.

The OVA-100 offers ± 0.01 dB repeatability and a dynamic range of up to 100 dB (depending on the model configuration). The OVA can be controlled via the front panel touch screen, or remotely via USB and Ethernet.

Another key feature is the wide wavelength range. The single-mode and Panda PM attenuators cover from 1200 to 1700 nm while the multimode versions cover from 750 to 1700 nm. A power monitoring PD can be added to read the power output of the instrument. Enable the power leveling setting to automatically adjust the attenuation for a constant selectable power level.

Features

- Precise optical power
- ± 0.1 dB accuracy
- ± 0.01 dB repeatability
- 100 dB dynamic range
- Available in single-mode 9 μ m, Panda PM, HI 1060, Multimode 50 μ m and 62.5 μ m
- Custom fiber types upon request

Applications

- Manufacturing production testing
- Bit Error Rate Testing (BERT)
- Channel equalization


Compliance

- UL/CSA 61010
- IEC 61010
- FCC Part 15 (Class A)
- EN 61326 (Class A)


Optical Variable Attenuator

Ordering Scheme & Instructions

1. Configure OVA Optical Variable Attenuator

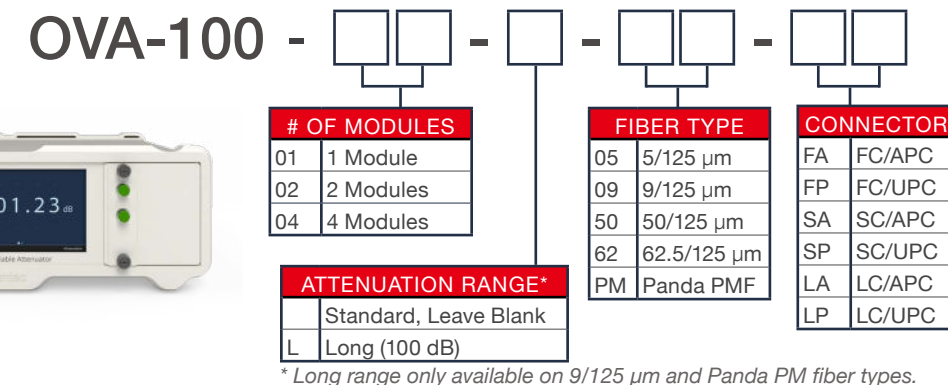

Optional additional Module type**

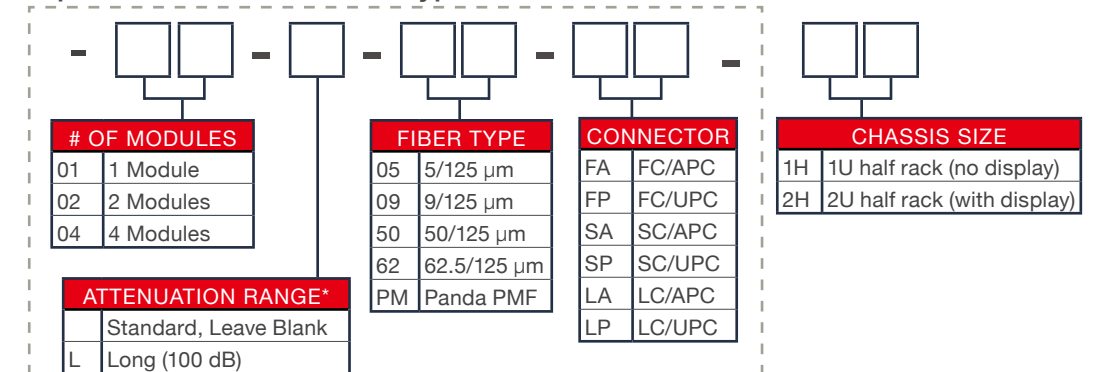

** repeat this ordering scheme for optional 2nd module variant

Ordering scheme examples:

OVA-100-01-09-FA-2H One standard range SM (9/125) attenuator in a 2U half rack)
OVA-100-01-L-09-FA-1H One long range SM (9/125) attenuator in a 1U half rack)
OVA-100-02-09-FA-02-50-FA-2H Two standard range SM (9/125) and two MM (50/125) attenuators in a 2U half rack

2. Add Accessories

2U-Rack-Short-Ear
2U Rack Short Ear



2U-Bezel
2U Rubber Bezels



2U-Connector-Plate
2U Chassis Connector Plate



2U-Rack-Long-Ear
2U Rack Long Ear Filler Plate



OVA Optical / Electrical Specifications

Parameter	Specification			
	Single-mode			Multimode
Fiber Type (μm)	9/125	Panda PM	HI1060	50/125 or 62.5/125
Wavelength Range (nm)	1200-1700	1200-1700	960-1080	750-1700
Attenuation Range (dB)	60/100		60	60
Insertion Loss (dB) ¹	1.2 / 1.5 ²	1.7 / 2.0 ²	2.5 ³	2.5 ⁴
Return Loss (dB)	60	55	50	35 ⁵
PDL (dB)	0.1	N/A	0.1	N/A
PER (dB) ⁶	N/A	23	N/A	N/A
Resolution (dB)	0.01			
Repeatability (dB)	± 0.01			
Absolute Accuracy (dB)	± 0.1			
Maximum Optical Input Power (dBm)	23			
Beam Block (dB)	100			
Remote Interface	USB or Ethernet			
Display	5” touchscreen			
Input Voltage	110 - 240 V AC, 50 - 60 Hz			
Power Consumption (VA)	80 maximum			

Notes:
¹ excluding connectors and couplers.
² at 1550 nm, add 0.3 dB at 1310 nm.
³ at 1060 nm, add 0.3 dB at 980 nm
⁴ at 1300 nm, add 0.3 dB at 850 nm
⁵ at 850 and 1350 nm.
⁶ at optimized wavelength.

Mechanical / Environmental Specifications

Parameter	Specification	
	1U half rack	2U half rack
Max Attenuator Count	2	4
Unit Dimensions W x H x D (cm) ¹	22.5 x 4.5 x 32.5	22.5 x 9 x 32.5
Unit Weight (kg)	3	4
Shipping Box Dimensions W x H x D (cm)	36.5 x 39 x 53	36.5 x 39 x 53
Volumetric Weight (kg) ²	15	15
Operating Temperature (°C)	0 to 55	
Storage Temperature (°C)	-40 to 70	
Humidity (Non-condensing)	Maximum 95% RH from 0 to 40°C	


Notes:
¹ excluding removable rubber bezels. Add 1.5 cm to W and 3.5 cm to H with the removable bezels..
² W*H*D / 5000



In the Box

OVA-100 - Optical Variable Attenuator

- OVA-100
- USB A to USB B cable (1.5 m)
- Ethernet cable (1.5 m)
- Power cable

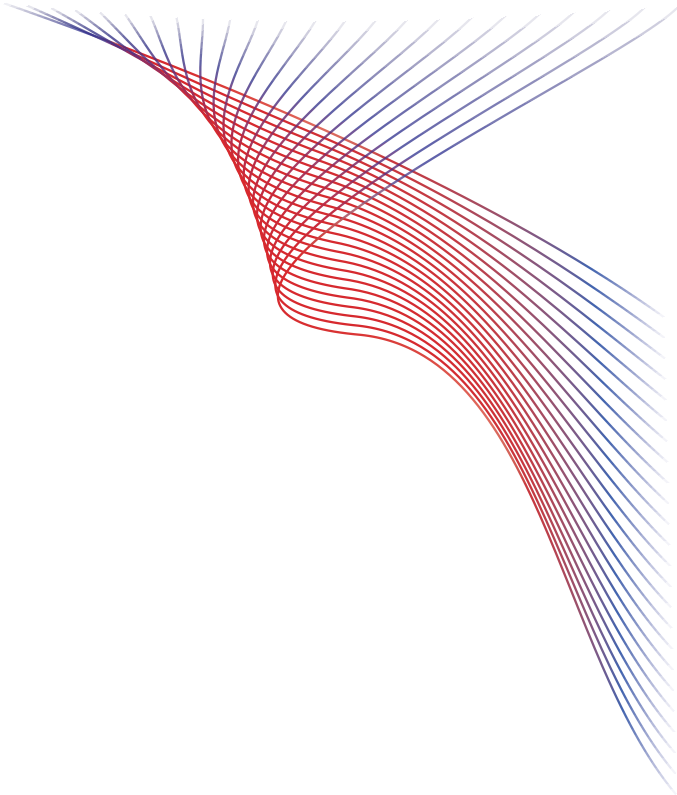

Santec Regional Sales Offices

Santec Japan Corporation
5823 Ohkusa-Nenjozaka, Komaki,
Aichi, 485-0802, Japan
Tel: +81-568-79-3536 | Fax: +81-568-79-1718

Santec Europe Ltd.
99 Park Drive, Milton Park, Abingdon,
Oxfordshire, OX14 4RY, UK
Tel: +44-20-3176-1550

Santec USA Corporation
400 Kelby Street, Suite 1501
Fort Lee NJ 07024 USA.
Toll Free: +1-800-726-8321

Santec (Shanghai) Corporation Limited
21F Room H, Hua Du Bldg., No.838 Zhangyang Road
Pudong District, Shanghai, 200122, China
Tel: +86-21-5836-1261